




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : E05B 17/00	A1	(11) International Publication Number: WO 98/53165 (43) International Publication Date: 26 November 1998 (26.11.98)
(21) International Application Number: PCT/GB98/01347 (22) International Filing Date: 12 May 1998 (12.05.98) (30) Priority Data: 9710602.5 23 May 1997 (23.05.97) GB (71) Applicant (for all designated States except US): MERITOR LIGHT VEHICLE SYSTEMS (UK) LIMITED [GB/GB]; Fordhouse Lane, Stirchley, Birmingham B30 3BW (GB). (72) Inventors; and (75) Inventors/Applicants (for US only): FISHER, Sydney, Ed- ward [GB/GB]; 85 Newborough Road, Shirley, Solihull, West Midlands B90 2HB (GB). KALSI, Gurbinder, Singh [GB/GB]; 59 Wolverhampton Road, Oldbury, Warley, West Midlands B68 0NF (GB). (74) Agents: SPRUCE, George, Philip et al.; Withers & Rogers, 4 Dyer's Buildings, Holborn, London EC1N 2JT (GB).		(81) Designated States: JP, KR, US. Published <i>With international search report.</i>

(54) Title: VEHICLE DOOR LATCH**(57) Abstract**

Vehicle door latch assembly includes power closing mechanism for driving a latching claw (10) from an outer position at which it has engaged a coacting striker (14) for holding the related door at first-safety position to an inner position drawing the door to a fully closed position, the claw being retained at either position by a conventional latching pawl (16) selectively releasable by unlatching means (20). The closing mechanism includes a drive pawl (24) pivoted on a powered drive lever (22) to turn the claw to the inner position, a disabling rocker (36) coupled to the arm latching means preventing engagement of the drive pawl when the latching pawl is disengaged so that release of the closed door is not obstructed.

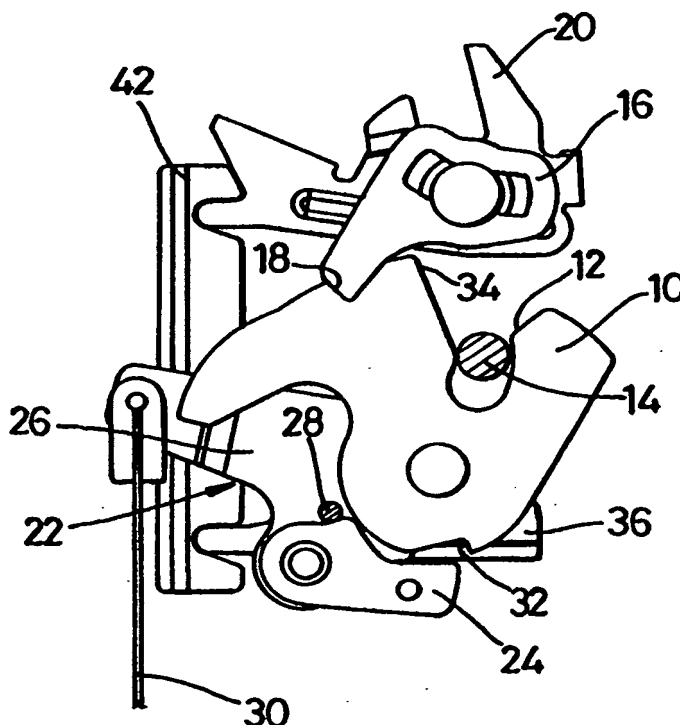

BEST AVAILABLE COPY

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

VEHICLE DOOR LATCH

This invention relates to latches for vehicle doors, particularly for light passenger and goods vehicles.

Most mass produced light vehicles have doors which must be closed manually to latch them shut by self-engagement of latch mechanism, usually on or in the door, with a striker, usually on the associated door post or frame. Due to the need to compress the weather sealing the door has to be slammed shut with some force to engage the latch positively. If the latch does not engage to keep the door fully closed it will only be latched at its first safety position, with the door slightly ajar, and the slamming process has to be repeated. There is not only substantial wear and tear on the door, door pull, and latch mechanism; there is also the nuisance of the noise particularly at night in residential areas.

Furthermore the development of more effective weathersealing and of variations in door styling and fitting, e.g. to reduce wind noise and/or resistance at speed, has been inhibited by the limitations imposed by the above slam closing.

The object of the invention is to provide improvements in vehicle door latching, in particular the provision of powered latching driving the door to fully closed condition without slamming in an effective, economical and reliable manner.

According to the invention there is provided a vehicle door latch assembly as defined by the characterising part of appended

Claim 1.

Conveniently the closing mechanism is electrically powered, and preferably the assembly will include switch means energising said mechanism automatically in response to shifting of the claw to the outer position on closing of the door to the first safety position, and de-energising the mechanism on sensing that the door has fully closed.

The drive input element may be a lever, conveniently pivoted co-axially with the claw, and carrying the drive pawl on an arm of the lever to engage a ratchet tooth of the claw.

The disabling means may comprise a pawl stop pivoted on the latter lever and coupled to the unlatching means, said stop being shifted to a position at which it holds the drive pawl out of engagement with the claw when the unlatching means disengages the latch pawl from the claw.

An example of the invention is now more particularly described with reference to the accompanying drawings, wherein;

Fig. 1 is an elevation of parts of a latch assembly with a claw thereof at its outer first safety position,

Fig. 2 is an opposite side view (opposite handed) of said parts,

Fig. 3 is a elevation as in Fig. 1 but with the claw driven to an inner door fully closed position,

Fig. 4 is another opposite side view showing unlatching with disablement of a drive pawl, and

Fig. 5 is a diagram of the electrical switching sequence of these parts of the assembly.

Referring firstly to Figs. 1 and 2, the latch assembly, which will be operatively secured in a door (not shown) in known manner, includes a conventional rotating latch claw 10 having a mouth 12 coacting with a striker 14 operatively mounted to the associated door post (not shown). In those Figures claw 10 is shown at an outer position at which it has been engaged by striker 14 as the door closed to a first safety position at which it is still slightly ajar, with little or no compression of its weather seals, turning claw 10 anticlockwise.

A latching pawl 16 has self-engagement with a ratchet tooth 18 formed as a notch in the upper claw periphery to retain the claw. Unlatching means, operated by the door handles (not shown) is of generally conventional construction and includes a release lever 20 selectively shiftable to free pawl 16 from the claw when the door is to be opened.

Power closing mechanism of the assembly includes a drive input lever 22 pivoted co-axially with claw 10 and carrying a drive pawl 24 pivoted on a leftwardly projecting arm 26 thereof. Lever 22 is shown at its position of rest in Figs. 1 and 2 with arm 26 raised, in this position pawl 24 is held clear of the claw periphery by a back-stop pin 28 on arm 26 which abuts a projection on the upper edge of the pawl.

The distal end of arm 26 is connected by a vertical pull cable 30 to an electric motor drive unit (not shown) through worm and gear or other reduction gearing to give maximum torque converted to rectilinear motion of cable 30.

In operation, when the door has been closed to first safety with

claw 10 in the outer position of Fig. 1, switching logic of the assembly energises the drive unit automatically after a time delay, driving arm 26 downwards to the position shown in Fig. 3. As lever 22 turns clockwise pawl 24 is carried towards the claw periphery, at the same time spacing it from back-stop pin 28. It is free to self engage with a drive ratchet tooth 32 in the lower edge of claw 10, so driving the claw further anti-clockwise to the inner position of Fig. 3. Thus the claw co-acts with striker 14 to drive the door to the fully closed position, compressing the weather seals.

Latching pawl 16 engages the left hand top edge of mouth 12, serving as a further ratchet tooth 34, so securing the door closed in conventional manner. As soon as lever 22 has completed its downward power stroke the electrical circuit restores the drive unit to its rest condition and lever 22 is returned to its position of rest as in Fig. 1, back-stop pin ensuring that drive pawl 24 is again disengaged from the claw.

To open the door latching pawl 16 is shifted in known manner by operation of release lever 20, freeing claw 10 to turn clockwise as the door is pushed open.

To ensure that the door can be opened even if power should fail or there should be an electrical malfunction the assembly includes disabling means. As best seen in Fig. 2 input lever arm 26 mounts a rocker lever 36 one arm of which is coextensive with drive pawl 24 and which project above a rearwardly extending pin 38 on that pawl. In normal operation, described above, pin 38 does not contact lever 36. The lefthand tail 40 of rocker lever 36 is connected to an arm of

release lever 20 by a rigid vertical link 42.

If the door is closed, i.e. the mechanism is in the Fig. 3 condition, but input lever 22 has failed to return to its rest position drive pawl 24 will remain engaged with tooth 32 which would obstruct clockwise rotation of the claw for opening the door. However, when release lever 20 is operated to disengage latching pawl 16, link 42 is drawn up, rotating rocker lever 36 to the Fig. 4 position and depressing pin 38 to ensure that drive pawl 24 is disengaged.



Various switching logic may be incorporated, one example is shown diagrammatically in Fig. 5. The circuitry may be interconnected with central door locking controls of the vehicle which operate locks of all the doors together. Switch 1 in the diagram senses whether the door is open or closed, being on except when the door is at or near first safety position or inwardly thereof to fully closed. Switch 2 senses whether the door is ajar, i.e. open or at or somewhat inward of first safety, only being off when fully closed. The power closing mechanism is energised by being switched in after a predetermined time delay when the door is swung closed to the first safety position detected by switch 1 and is operated for a timed period sufficient to allow for the necessary inward overtravel of the door against the weather seals which ensures that latching pawl has fully engaged claw 10 at its inward position.

CLAIMS

1. A vehicle door latch assembly including a pivotally mounted latch claw (10) having a mouth (12) operatively co-acting with a striker (14) as the door nears its closed position, a latching pawl (16) self-engaging with the claw to hold it releasably at an outer position operatively latched to the striker to retain the door at a near-closed first safety position and at an inner position so latched to retain the door at a fully closed position, unlatching means (20) selectively operable to disengage the latching pawl for opening the door, and power closing mechanism operable to turn the claw inwardly from the outer position to engagement with the striker to draw the door to the fully closed position: characterised in that the power closing mechanism includes a movable drive input element (22) carrying a drive pawl (24) which, as said element is powered from its position of rest, self-engages the claw to turn it from its outer to its inner position; and disabling means (36,42) linked to the unlatching means and including a disabling formation (38) co-acting with the drive pawl to prevent engagement of the latter with the claw when the latching pawl is disengaged to ensure that the closing mechanism does not obstruct release of the latched door.

2. An assembly as in Claim 1 characterised in that the drive input element is a lever (22) carrying the drive pawl (24) on an arm (26) thereof to engage a ratchet tooth (32) of the claw.

3. An assembly as in Claim 2 characterised in that the lever (22) is pivoted co-axially with the claw (10).
4. An assembly as in Claim 2, 3 or 4) characterised in that the disabling formation is a pawl stop (36,38) pivoted on said lever (22) and coupled to the unlatching means (20), said stop being shifted to a position at which it holds the drive pawl (24) out of engagement with the claw (10) when the unlatching means disengage the latch pawl (16) from the claw.
5. An assembly as in Claim 1 characterised in that the closing mechanism (22,24) is electrically powered.
6. An assembly as in Claim 5 characterised in that it includes switch means energising said mechanism (22,24) automatically in response to shifting of the claw (10) to the outer position on closure of the door to the first safety position.
7. An assembly as in Claim 6 characterised in that said switch means further operates to de-energize the mechanism (22,24) in response to latching of the door at the fully closed position.

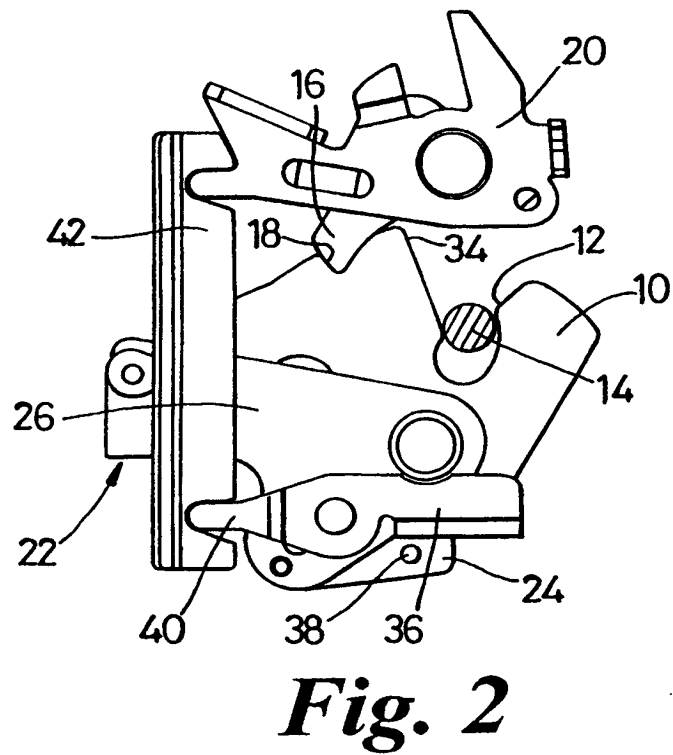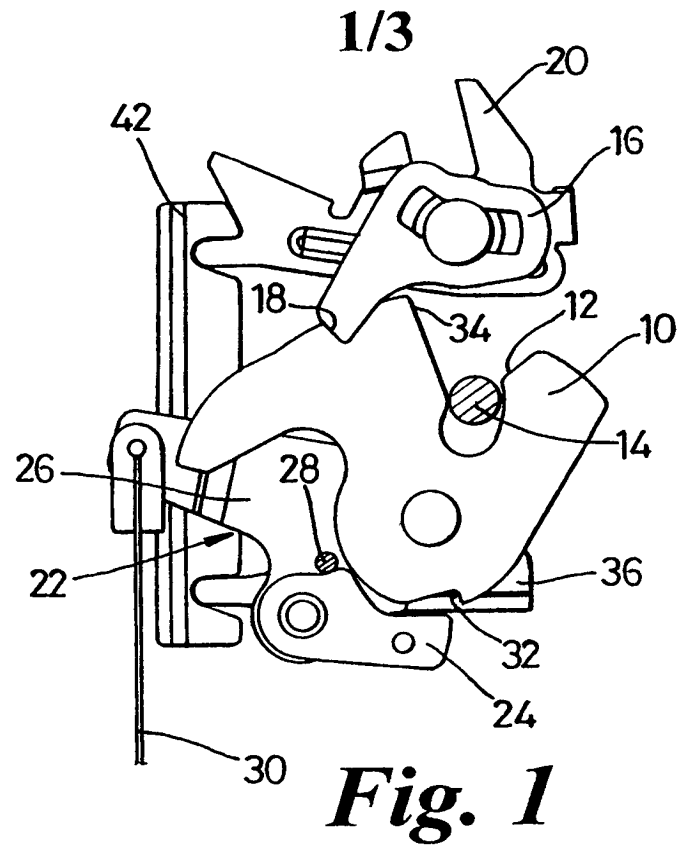

2/3

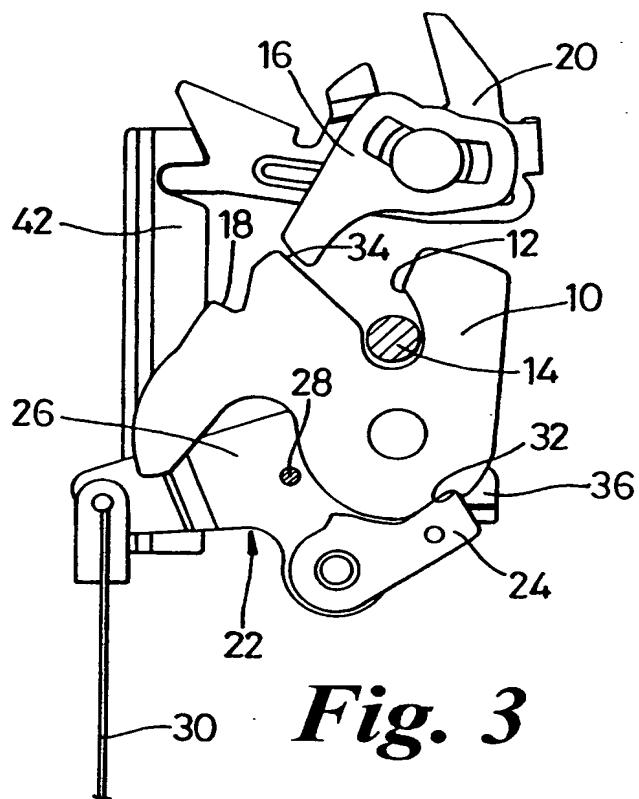


Fig. 3

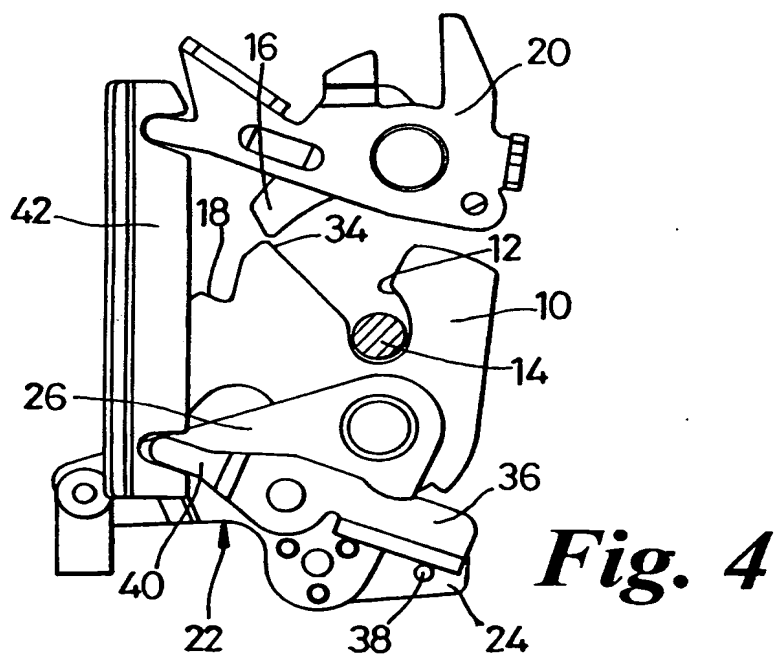


Fig. 4

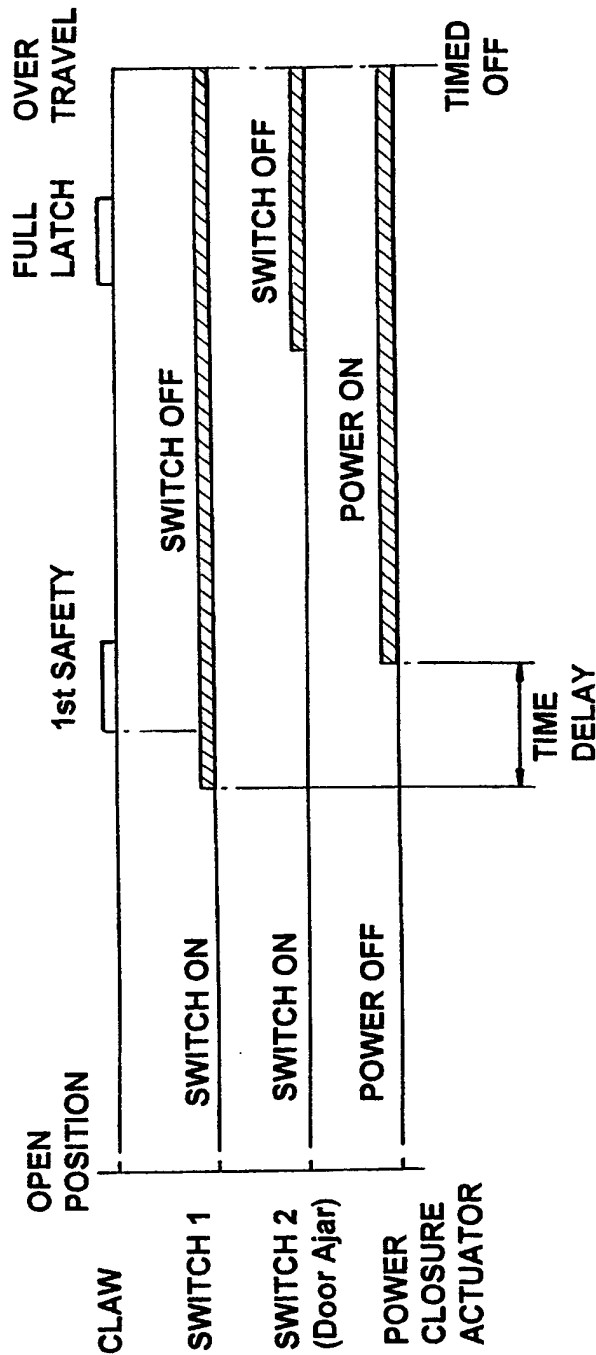


Fig. 5

INTERNATIONAL SEARCH REPORT

Inte onal Application No

PCT/GB 98/01347

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 E05B17/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 E05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 397 966 A (ROLTRA-MORSE) 21 November 1990 see claim 1; figures 1-10 ---	1
A	US 5 288 115 A (J. INOUE ET AL) 22 February 1994 see claim 1; figures 1-6 ---	1
A	US 5 564 761 A (T. MIZUKI ET AL) 15 October 1996 see claim 1; figures 1-4,6-10 ---	1
A	US 5 273 324 A (F. KOBAYASHI) 28 December 1993 see claim 1; figures 1-7 ---	1
-/--		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

31 July 1998

Date of mailing of the international search report

12/08/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Krabel, A

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 98/01347

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 41 07 219 A (BAYERISCHE MOTOREN WERKE) 10 September 1992 see claim 1; figure 1 -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int: ional Application No

PCT/GB 98/01347

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 397966 A	22-11-1990	DE 69007852 D	11-05-1994
		DE 69007852 T	28-07-1994
		ES 2050856 T	01-06-1994
		JP 2289777 A	29-11-1990
		US 4988135 A	29-01-1991
US 5288115 A	22-02-1994	JP 2557006 B	27-11-1996
		JP 5156855 A	22-06-1993
		JP 5156858 A	22-06-1993
		JP 2552214 B	06-11-1996
		JP 5171852 A	09-07-1993
		JP 2594857 B	26-03-1997
		JP 5179854 A	20-07-1993
US 5564761 A	15-10-1996	NONE	
US 5273324 A	28-12-1993	NONE	
DE 4107219 A	10-09-1992	DE 4022811 A	23-01-1992
		DE 59102109 D	11-08-1994
		EP 0467057 A	22-01-1992
		JP 4261983 A	17-09-1992
		US 5217266 A	08-06-1993

THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)